



BN Products - USA, LLC

BN Products - USA, LLC

## **Construction Tools**

Quality Products  
Engineered with Intelligence  
and Imagination™

**BN Products - USA, LLC.**

3450 Sabin Brown Road • Wickenburg, Arizona 85390  
(800) 992-3833 • (928) 684-2813 • email: [mail@bnproducts.com](mailto:mail@bnproducts.com)

**Visit us on the Web: [www.bnproducts.com](http://www.bnproducts.com)**

## BNCE-20 The Cutting Edge Saw™



A new design in a multipurpose cutting tool that can be used on all kinds of material found on the job. It can easily cut rebar, all-thread rod, locks, chain, EMT conduit, copper pipe, steel rods, steel tubing, and much more. This hand-held tool is lightweight and powered by 1100W motor that only pulls 9 amps using standard 120V/60Hz. It features a three position handle and has a no load speed of 2000 rpm. The capacity of the opening is .875" (23.62mm). This tool is ETL Listed and is excellent for cutting material flush with concrete or block. Prepaid freight on four + tool order to one location.

BNCE-20 Corded Model	
Voltage	120
Hertz	60
AMPS	9
Watts	1100
Blade Size	4.375" (110 mm)
Blade Type (2 ea.)	Tungsten Carbide Tipped
Blade Number of Teeth	24
Blade Kerf	1.6 mm
No Load RPM	2,000
Depth of Cut	.860" (21.8 mm)
Construction Type	DOUBLE INSULATED
Cord Type	18 AWG, 2 CORD
Plug Type	U.S. POLARIZED 2-PRONG
Cord Length	10 ft. (3 m)
Length x Width	20.3" (515 mm) x 5.5" (140 mm)
Tool Height	3.9" (99 mm)
Net Tool Weight	7.6 lbs. (3.5 kg)



## BNMPC-135 Mini Metal Saw



This tool is lightweight and easy to handle. We have made the cutting depth equal to a 2 x 4 wood stud or standard metal strut. It has the ability to cut all-thread cleanly up to 1-1/2" in diameter without leaving a burr. Its great for cutting light gauge corrugated metal panels including b-decking. It is a great tool for cutting through pipe, tube or other bars.

The tool includes:

- A vacuum attachment
- Two metal-cutting blades
- An adjustable cutting plate
- A cutting guide
- A hex wrench

Blade diameter	5-1/3"
Rated power input	710W
The no-load speed	4200 rpm
Maximum cutting depth	1-7/8"


## BNT-64 Rebar Tying Tool

The BNT-64 Rebar Tier reduces tying time and is great for repetitious tying work. It also reduces the risk of carpal tunnel and back injuries. The one-hand operation allows the other hand to hold rebar in place. It securely ties up to #10 (32mm) x #10 (32mm) rebars. The tool uses strong double tie wrap of 18 gauge (.081") galvanized wire. It makes consistent ties with no wire waste in only 1.6 seconds a tie. Each wire spool ties 120-200 rebars, depending on the rebar sizes. Wire spools are quickly and easily changed. The patented design allows you to easily change the handle from a vertical work position to a horizontal work position. The tool is shipped standard with the #32 wire guide for tying two #6 bars together. We also carry optional wire guides for three other rebar combinations including our #64 for tying #10 bars together. The tying tool comes complete with seven spools of tying wire, two batteries with a quick charger unit all in an impact resistant case.



Tool Weight	8.4 lbs (3.8 kg) w/ battery and wire spool
Shipping Weight	27 lbs (12.25 kg) complete package
Tool Dimensions L x W x H (mm)	25.74" (660mm) x 3.12" (80mm) x 7.02" (180mm) for horizontal work 22.62" (508mm) x 3.12" (80mm) x 11.31" (290mm) for vertical work
Wire Spool Length / Wire Types	(148 ft) 45 m per spool / Galvanized Wire
Wire Carton/ Shipping Weight	40 wire spools per carton / 29 lbs. (13 kg)
Ties Per Battery Charge	750 ties per battery charge (4-5 wire spools)
Standard Wire Guide Installed	#32 wire guide ties maximum #6 x #6 rebars
Optional Wire Guides	#26 wire guide ties maximum #3 x #4 rebars • #51 wire guide ties maximum #8 x #8 rebars • #64 wire guide ties maximum #10 x #10 rebars
Battery Type (BN-12VNiMh)	Rechargeable Ni-Mh (nickel metal hydride)
Battery Voltage/ Recharging Time	DC 12 Volt / Approx. 30 minutes
Battery Charger (#BN-12VChgr)	110-240 VAC, 50/60Hz

## BNBC Bolt Cutter

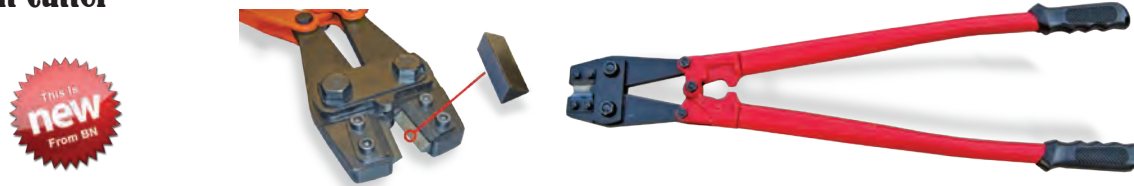

The new BN Products Bolt Cutter unlike similar tools of this kind has three durable cutting edges instead of just one that eventually wears out over a short period of time. The blades on this new model bolt cutter are made of special hardened alloy tool steel for a long lasting and more durable life. Along with having three durable edges, it comes with handles and grips that are designed for better mechanical leverage and control. This one-of-a-kind tool comes in three different models, 24", 30", and 36".

Product No.	Notes:
BNBC-24	24" Bolt Cutter Triple edge Cutting Blade Capacity: 5/16" (8mm)
BNBC-30	30" Bolt Cutter Triple edge Cutting Blade Capacity: 3/8" (9.5mm)
BNBC-36	36" Bolt Cutter Triple edge Cutting Blade Capacity: 7/16" (11mm)
RB-BNBC	Replacement Blade Set (Two blocks)



## DCC-1618 #5 Rebar Cutter

The DCC-1618 cordless rebar cutter will safely and cleanly cut rebar up to 5/8" diameter grade 60. This self-contained electric/hydraulic unit will also cut other items like chain, bolts, and rod. The DCC-1618 can be used in rescue operations, cut in close proximity to a trapped victim, does not throw sparks or heat. The cutting head quickly rotates up to 345 degrees for using in vertical, horizontal, or difficult applications. A safety relief valve for retracting the piston and a cutting guard are standard features. This tool ships complete with (2) each 18 volt DC batteries, 30-60 minute fast battery charger, removable side handle, plastic carrying case, and a tool kit. Available Tune-up kit for DCC-1618 cordless rebar cutter - TU1618K



Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cuts per battery /Cutting speed	75 cuts on full charge / 5 seconds
NiCad Battery (EB12B)	18 Volt DC, 3000 mAh
Battery Charger (UC14YFA)	115 Volt 60 Hz Charger
Tool Weight	16.1 lbs.(7.3 kg) with battery
Dimensions (w/o side handle) L x W x H	17.9"(460mm) x 3.8"(98mm) x 9.4"(240mm)



## DC-16LZ Portable #5 Rebar Cutter

The DC-16LZ is a medium-duty rebar cutter that will safely, efficiently, and cleanly cut rebar up to #5 (5/8") diameter grade 60. This self-contained electric/hydraulic unit will also cut other items like chain, bolts and rod but is specifically designed for rebar. The DC-16LZ is intended for effortless medium-duty applications on vertical and horizontal rebar cutting applications. This tool would be a great asset for swimming pool, masonry, and ICF contractors. The DC-16LZ is a cold-cutting shear; unlike saws with abrasive blades and cutting torches, there are no sparks or flame. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a durable plastic carrying case with hydraulic oil and a tool kit. Available Tune-up kit for DC-16LZ electric rebar cutter - TU16LZK




Double Insulated

Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cutting Speed / Pressure	2 Seconds / 13 Tons
Voltage / Amperage	115V 50/60Hz / 9 Amps
Tool Weight	15 lbs. (6.8 kg)
Dimensions L x W x H	14.8" (380mm) x 6.8" (175mm) x 4.1" (105mm)

## DC-16W Portable #5 Rebar Cutter

The DC-16W portable heavy-duty rebar cutter will safely, efficiently, and cleanly cut rebar up to #5 (5/8") diameter grade 60. This self-contained electric/hydraulic unit will also cut other items like chain, bolts and rod but is specifically designed for rebar. The DC-16W cutter is designed for effortless vertical and horizontal cutting applications. The DC-16W is a cold-cutting shear unlike saws with abrasive blades and cutting torches. There are no sparks or flame and no trailing hoses to snare equipment or worker's feet. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a durable plastic carrying case with a removable side handle, hydraulic oil and a tool kit. Available Tune-up kit for DC-16W electric rebar cutter - TU16K

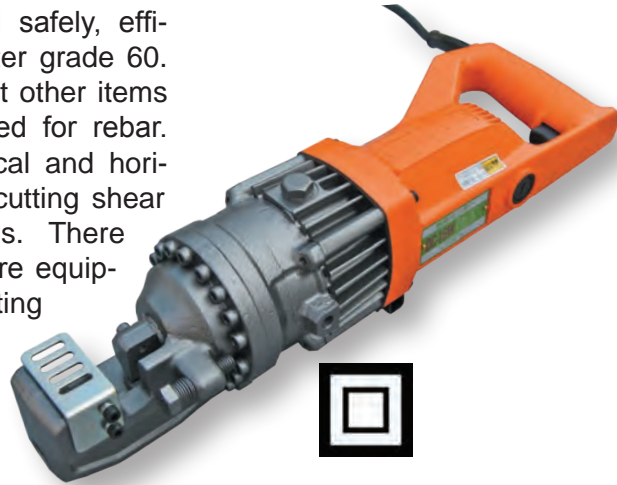

Maximum Cutting Diameter	5/8" #5 Rebar (16mm) Grade 60
Cutting Speed / Pressure	2.5 Seconds / 15 Tons
Voltage / Amperage	115V 50/60Hz / 10 amps
Tool Weight	17.6 lbs (8 kg)
Dimensions L x W x H (w/side handle)	18" (460mm) x 10.5" (270mm) x 4.5" (115mm)



## DC-20WH Portable #6 Rebar Cutter

The DC-20WH portable heavy-duty rebar cutter will safely, efficiently, and cleanly cut rebar up to #6 (3/4") diameter grade 60. DIAMOND originated this concept in 1972; continuous development has led to higher output, lower weight, and even greater toughness and durability. The DC-20WH is a cold-cutting shear unlike saws with abrasive blades and cutting torches. There are no sparks or flame and no trailing hoses to snare equipment or worker's feet. Ideal for cutting epoxy-coated rebar. Fastest, safest, and most economical way to cut rebar on the job. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a durable plastic carrying case with hydraulic oil and a tool kit. Available Tune-up kit for DC-20XH & WH electric rebar cutters - TU20K



Maximum Cutting Diameter	3/4" #6 Rebar (19mm) Grade 60
Cutting Speed / Pressure	3 Seconds / 15 Tons
Voltage / Amperage	115V 50/60Hz / 10 amps
Tool Weight	25.4 lbs (11.5 kg)
Dimensions L x W x H	16" (410mm) x 4.3" (110mm) x 8.2" (210mm)

## DC-25X Portable #8 Rebar Cutter

The DC-25X portable heavy-duty rebar cutter will safely, efficiently, and cleanly cut rebar up to #8 (1") diameter grade 60. The DC-25X cutter is ideal for a small fabrication shop, especially if used with our CWS-2025 WorkStation. Because our rebar cutters feature a locking trigger switch, the cutter can be operated with a foot pedal switch and our GFI protected electrical outlet. There are no sparks or flame so it also works great on epoxy-coated rebar. It's the fastest, safest, and most economical way to cut rebar on the job. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a steel carrying case with hydraulic oil and a tool kit. Available Tune-up kit for DC-25X electric rebar cutter - TU25K




Maximum Cutting Diameter	1" #8 Rebar (25mm) Grade 60
Cutting Speed / Pressure	5 Seconds / 30 Tons
Voltage / Amperage	115V 50/60Hz / 12 amps
Tool Weight	49.6 lbs (22.5 kg)
Dimensions L x W x H	20" (515mm) x 5.9" (150mm) x 9.8" (250mm)



## DC-32WH Portable #10 Rebar Cutter

The DC-32WH portable heavy-duty rebar cutter will safely, efficiently, and cleanly cut rebar up to #10 (1 1/4") diameter grade 60. The DC-32WH cutter is ideal for bridge and highway work, and in small rebar fabrication shops. This unit is available in combination with a DBD-32X bender on a stand, in a work station table and on a trailer. There are no sparks or flame so it also works great on epoxy-coated rebar. It's the fastest, safest, and most economical way to cut rebar on the job. A safety relief valve for retracting the piston and a cutting guard are standard features. Ships complete in a wooden carrying case with hydraulic oil and a tool kit. Available Tune-up kit for DC-32WH electric rebar cutter - TU32WHK

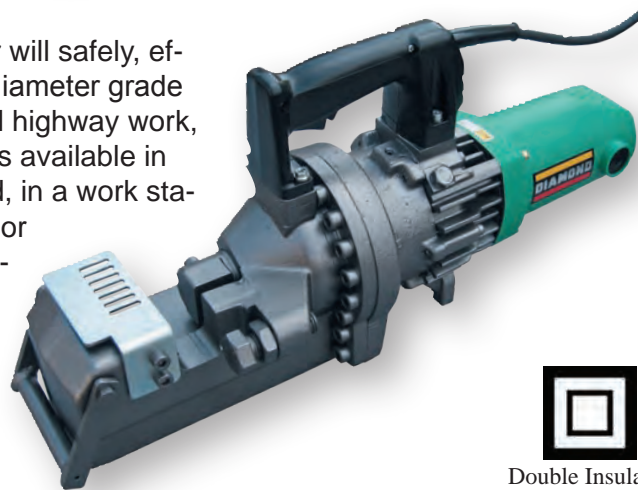

Double Insulated

Maximum Cutting Diameter	1-1/4" #10 Rebar (32mm) - Grade 60
Cutting Speed / Pressure	7 Seconds / 45 Tons
Voltage / Amperage	115V 50/60Hz / 18 amps
Tool Weight	79 lbs (35.8 kg)
Dimensions L x W x H	23.1" (591mm) x 7" (180mm) x 10.6" (272mm)



## HB-16W Portable #5 Rebar Bender



90 degree shoe and collar set

The HB-16W portable heavy-duty electric/hydraulic rebar bender helps save valuable man-hours by bending rebar up to 5/8" (#5) grade 60 from 0-135 degrees in-place at the job site. Other features include a double insulated electric motor and a removable bending guide for repeating the same angle bend. A standard 90 degree bending shoe and collar set make it simple to repeat 90 degree bends without a guide. The removable bending collar increases the bending radius and minimizes rebar breakage, especially on #5 grade 60. This portable electric/hydraulic rebar bender ships complete in a steel carrying case with hydraulic oil and a tool kit. Solves bending applications other tools can't even attempt.

Maximum Bending Diameter	5/8" #5 Rebar (16mm) - Grade 60
Bending Angle / Speed	0 - 135 degrees / 8 Seconds
Voltage/ Amperage	115V 50/60Hz / 10 amps
Tool Weight	33 lbs (15 kg)
Dimensions L x W x H	22.8" (584mm) x 7.6" (195mm) x 8" (205mm)



## DBR-25WH Portable #8 Rebar Bender



Small and large bending die set

The DBR-25WH is a portable heavy-duty electric/hydraulic rebar bender and straightener. It helps save valuable man-hours by cleanly and efficiently bending or straightening bent rebar. It functions as a simple 90-degree portable electric rebar bender. The interchangeable bending hook covers rebar diameters from #4 to #8 grade 60. Maximum pressure for bending and straightening ranges from 8.5 to 11 tons. It's portable and versatile enough to bend or straighten rebar in-place with its push/pull hydraulic capabilities. It will bend a 90-degree angle in only four seconds. The bending head also rotates 360 degrees. Ships complete in a wooden carrying case with hydraulic oil, a tool kit and two additional bending dies. This tool solves bending applications other tools can't even attempt.

Maximum Bending Diameter	1" #8 Rebar (25mm) Grade 60
Bending Angle	Up to 94 degrees (1/2") - up to 90 degrees (1")
Voltage / Amperage	115V 50/60Hz / 12 amps
Tool Weight	62.3 lbs (28 kg)
Dimensions L x W x H	25.75" (660mm) x 10.5" (270mm) x 7.8" (200mm)

## DBD-16X Portable #5 Rebar Bender

The DBD-16X heavy-duty portable rebar bender helps save valuable man-hours by bending rebar up to #5 (5/8") grade 60 at the job site or in your shop. This strong electrical-mechanical bender has two preset angle locks for repeating the same angle bend. The dial-type angle selector can be set to accurately bend any angle from 0-180 degrees. Bends three each #3 rebar or two each #4 rebar or one each #5 rebar at one time. An emergency stop switch and two side lifting handles are standard features. Ships complete with set of (6) bending rollers in a steel carrying case, a tool kit, and a standard foot pedal control switch for hands-free bending.



Maximum Bending Diameter	5/8" (#5) Rebar (16mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 5 seconds
Voltage / Amperage	115V 50/60Hz / 10 amps
Tool Weight	90 lbs (40.8 kg)
Dimensions L x W x H	16.6" (425mm) x 12.5" (320mm) x 16.2" (415mm)



## DBD-20X Portable #6 Rebar Bender



The DBD-20X heavy-duty portable rebar bender helps save valuable man-hours by bending rebar up to #6 (3/4") grade 60 at the job site or in your shop. This strong electrical-mechanical bender has two preset angle locks for repeating the same angle bend. The dial-type angle selector can be set to accurately bend any angle from 0-180 degrees. An emergency stop switch and two side lifting handles are standard features. The DBD-20X portable rebar bender comes complete with set of six bending rollers in a steel carrying case, a tool kit, and a standard foot pedal control switch for hands-free bending.

Maximum Bending Diameter	3/4" (#6) Rebar (19mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 7 seconds
Voltage / Amperage	115V 50/60Hz / 15 amps
Tool Weight	134.5 lbs (61 kg)
Dimensions L x W x H	16.4" (420mm) x 18" (462mm) x 16.2" (415mm)



### DBD-25X Portable #7 Rebar Bender

The DBD-25X heavy-duty portable rebar bender helps save valuable man-hours by bending rebar up to #7 (7/8") grade 60 at the job site or in your shop. This strong electrical-mechanical bender has two preset angle locks for repeating the same angle bend. The lever-type angle selector can be set to accurately bend any angle from 0-180 degrees. An emergency stop switch and two lifting handles are standard features. The DBD-25X portable rebar bender comes complete with a set of six bending rollers in a steel carrying case, a tool kit, a bender cover, and a standard foot pedal control switch for hands-free bending.



Maximum Bending Diameter	7/8" (#7) Rebar (22mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 6 seconds
Voltage / Amperage	115V 50/60Hz / 12 amps
Tool Weight	190 lbs (86 kg)
Dimensions L x W x H	19" (490mm) x 21.5" (550mm) x 17.2" (440mm)



### DBD-25H Portable #8 Rebar Bender

This heavy-duty portable bender helps to save valuable man-hours by effortlessly bending rebar up to #8 (1") grade 60 at job sites or in your shop. This electrical-mechanical bender has two preset angle locks for repeating the same angle bend. The lever-type angle selector can be set to accurately bend any angle from 0-180 degrees. The roller chart makes it easy to select the correct combination of rollers to achieve an inside bending diameter of six times the rebar diameter meeting ACI 318-05 specifications. An emergency stop switch and two lifting handles are standard features. The DBD-25H portable rebar bender comes complete with nine bending rollers in two steel carrying cases, a tool kit, a bender cover, and a standard foot pedal control switch for hands-free bending.



Maximum Bending Diameter	1" (#8) Rebar (25mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 9 seconds
Voltage / Amperage	115V 50/60Hz -15 amps
Tool Weight	210 lbs. (95 kg)
Dimensions L x W x H	21" (540mm) x 22.6" (580mm) x 17.2" (440mm)

## DBD-32X Portable #9 Rebar Bender



The DBD-32X is a heavy-duty portable table-type bender. This unit is the largest 115 volt portable rebar bender available. This powerful electrically driven mechanical unit will easily bend 1-1/8" grade 60 rebar 180 degrees in only 8 seconds. This fast and accurate bender is a valuable tool for small to medium size production shops. It comes standard with a hands-free foot pedal control switch and a complete bending radius roller set. This unit is available separately or in combination with a cutter mounted on a skid, stand or trailer unit. An optional stand is also available.

Maximum Bending Diameter	1-1/8" (#9) Rebar (29mm) Grade 60
Bending Angle / Speed	Up to 180 degrees / 8 seconds
Voltage / Amperage	115V 50/60Hz / 12 amps
Tool Weight	397 lbs (180 kg)
Dimensions L x W x H	23" (590mm) x 24.2" (620mm) x 18.7" (480mm)



## DBC-16H #5 Rebar Cutter/Bender



This DBC-16H portable combination rebar cutter and bender provides jobsite cutting and bending of rebar all in one tool. The unique design provides the operator the ability to cut and bend rebar for in-place rebar or stationary fabrication applications. Now you have the ability to cut and bend rebar protruding from a wall or column or just fabricate what you need on a table. Our powerful electric/hydraulic design is for heavy-duty #5 (16 mm) grade 60 rebar. It's fast and easy to use, there is no changing of attachments, bends rebar up to 180 degrees. A steel carrying case, tool kit, hydraulic oil and operations manual are included. All of our tools carry a one-year parts and labor warranty.

Cut / Bend Speed	3 seconds /180 degree bend in 7 seconds
Bending Roller	2.42" (62 mm) Diameter (R 31)
Clearance (In-place) Cutting	1-3/4" (44.5 mm) from Surface
Clearance (In-place) Bending	4.5" (115 mm) from Surface
Rebar Capacity	Up to #5 (16mm) Grade 60
Power Supply	Electric motor 115v, 50/60 Hz -10 amps
Total Weight (kg)	40 lbs. (18.2) Tool Weight, 62lbs. (28.2) Shipping Weight
Tool Dimensions	25-1/8" L x 6-3/8" W x 8-5/8" H including lifting handles (cutter up)

## DBC-20X Combination #6 Rebar Bender/Cutter

The DBC-20X combination bender and cutter is rated for 3/4" grade 60 rebar. This ultimate combination unit combines the very popular DC-20WH rebar cutter and the DBD-20X rebar bender together on a heavy-duty powder-coated skidded housing. The bender and cutter are simply plugged into the weather-protective electrical outlets, no hard wiring. The DC-20WH cutter can be removed and used in a portable application or secured in the stationary position with U-bolts and operated hands-free by a standard foot pedal switch. A toggle switch allows you to go from bending to cutting, the GFI plug is a standard safety feature. This unit is shipped fully assembled and includes a steel case with six bending rollers and a foot pedal control switch.



	DC-20WH Rebar Cutter		DBD-20X Rebar Bender	
Cut / Bend Speed	3 seconds		180 degree bend in 7 seconds	
Rebar Capacity	Grade 60	Up to #6 (3/4")	Grade 60	Up to #6 (3/4")
Power Supply	Electric motor 115V, 50/60 Hz -10 amp Cutter, 15 amp Bender			
Weight	212 lbs. Total Weight (96 kg), 25.4 lbs. Cutter, 134.5 lbs. Bender			
Dimensions	28" (711mm) L x 18" (457mm) W x 21.5" (546mm) H with lifting handles			



## DBC-25H #8 Combination Rebar Bender/Cutter

The DC-25X rebar cutter can be removed and used in a portable application or secured in the stationary position with U-bolts and operated hands-free by the convenient foot pedal switch. This is a combination of the very popular DC-25X rebar cutter and our new DBD-25H rebar bender together on a heavy-duty powder-coated skidded housing. The bender meets all ACI 318-05 specifications. A toggle switch allows you to go from bending to cutting and both are operated hands-free with a foot pedal. The GFI plug is a standard safety feature. This combination unit is easy to maintain and is backed with a one-year parts and labor warranty. The unit is shipped fully assembled and includes two steel cases with nine bending rollers and a #1BR5130 foot pedal control switch.



	DC-25X Rebar Cutter	DBD-25H Rebar Bender
Cut / Bend Speed	5 seconds	180 degree bend in 9 seconds
Rebar Capacity	Grade 60 Up to #8 (1")	Grade 60 up to #8 (1")
Power Supply	Electric motor 115v, 50/60 Hz –12 amp Cutter, 15 amp Bender	
Total Weight	321 lbs. Total Weight, 49.6 lbs. Cutter, 210 lbs. Bender	
Dimensions	32.75" L x 28" W x 22.50" H including lifting handles	



## DBC-2520 & DBC-2525 Combination Rebar Bender/Cutter

These are essential combination rebar bender and cutter units. They simply combine the very popular DBD-25X bender with the DC-20WH or DC-25X rebar cutter both together on a stationary stand. The main advantage to owning this versatile combination unit is that the rebar cutter can be simply removed and used in any portable application or locked into a stationary position and then operated by a standard foot pedal switch. The other advantage is production; the bender table is at the ideal working height and the DBD-25X bends rebar from 0 -180 degrees. The BCSE-25X combination stand joins the bender and cutter both together.



	DBC-2520	DBC-2525
Max. Cutting	#6 or 3/4" Grade 60	#8 or 1" Grade 60
Max. Bending	#7 or 7/8" Grade 60	#7 or 7/8" Grade 60
Cutter Power	115 Volt 50 / 60 Hz -10 amps	115 Volt 50 / 60 Hz -12 amps
Bender Power	115 Volt 50 / 60 Hz -12 amps	115 Volt 50 / 60 Hz -12 amps
Total Weight	250 lbs. (113.5 kg)	274 lbs. (124.5 kg)
Dimensions	19.25" (490mm) L x 24.75" (629mm) W x 37.25 (946mm) H	



## DBC-3225 & DBC-3232 Combination Rebar Bender/Cutter



These are essential combination rebar bender and cutter units. They simply combine the very popular DBD-32X bender with the DC-25X or DC-32WH rebar cutter both together on a stationary stand. The main advantage to owning this versatile combination unit is that the rebar cutter can be easily removed and used in any portable application or locked into a stationary position and then operated by a standard foot pedal switch. The other advantage is production; the bender table is at the ideal working height and the DBD-32X bends rebar from 0 -180 degrees. The BCSE-32X combination stand joins the bender and cutter both together.

	DBC-3225	DBC-3232
Max. Cutting	#8 or 1" Grade 60	#10 or 1-1/4" Grade 60
Max. Bending	#9 or 1-1/8" Grade 60	#9 or 1-1/8" Grade 60
Cutter Power	115 Volt 50 / 60 Hz -12 amps	115 Volt 50 / 60 Hz -18 amps
Bender Power	115 Volt 50 / 60 Hz -12 amps	115 Volt 50 / 60 Hz -12 amps
Total Weight	482 lbs. (219 kg)	511 lbs. (232 kg)
Dimensions	23" (590mm) L x 27" (686mm) W x 37.25 (946mm) H	

## MBC-16B Manual Rebar Bender/Cutter

This tool has a longer handle and a cam mechanism that provides greater leverage when cutting and bending grade 60 rebar. It features an adjustable 2-1/2" (63.5mm) diameter bending roller and replaceable cutting jaws that incorporate two open slots with innovative shaped blades to prevent chipping. The sturdy frame design is firmly mounted on a 2" x 8" x 60" wooden board and is ready to use. Other features include a comfortable 12" long no-slip handle grip and a lifting chain and ring to make it easier to carry to and from the job site.

Model No.	MBC-16B
Cutting Capacity	#5 (5/8") (16 mm) rebar grade 60 (420 MPa)
Bending Capacity	#5 (5/8") (16 mm) rebar grade 60 (420 MPa)
Bending Capability	0 - 180°
Replacement Jaw Set	#MBC-16RJS - Weight: 7 lbs. (3.2 kg)
Shipping Weight	57 lbs. (26 kg) with wood board
Overall Dimensions	60.5" L x 7.5" W x 10" H
Warranty	6 months (includes parts and labor)



## BNR7231A Drywall Sander

This Drywall and Plaster Sander is capable of sanding walls and ceilings. It provides you with a way to reach the entire wall from floor to ceiling. Just use the built-in extensions to change the length of the tool from 4 ft. to 7.2 ft. long. With extension you can easily reach up to 12 1/2 ft. It has a removable brush segment that allows the edge of the Sanding Paper to come right up to the wall edge. The tool can be folded in half to reduce the length of the tool and includes a carrying case. The motor is mounted on the sanding head to reduce the number of moving parts and provides a direct drive to the sanding head. Center and edge vacuum locations provide a large area of dust collection. Just mate the sander up with a vacuum to ensure a dust free working environment.



Model	BNR7231A
Power	600W
Voltage	120V/60HZ
No Load Speed	0-1000 rpm
Sanding Motion	Rotation
Sanding Pds (dia.)	9"
Abrasives (dia.)	9"
Connection for dust Extraction (dia.)	1.5"/1.25"
Weight	10.3 Lbs.

**The BNR6169 Hand Held Paddle Mixer** has a variable speed trigger with a lock-on button for continuous operation. It comes with a standard M14 paddle connection or 1/2" drill chuck for any mixing paddles. The rear D-handle rotates 360° and the tool comes with a 3-position removable side handle. Includes BNR010-120 paddle and carrying case.

Power	1050W / 9 amps / 1.4 Hp
Voltage	120V/60Hz
Number of Gears	1
No Load Speed	0-600 rpm
Drill Capacity	1/2" (13mm)
Motor Protective Type / Class	Double Insulated / II
Mixing Paddle (ø Max.)	4-3/4" (120mm)
Shipping Weight	13.25 lbs (6 Kg)



**The BNR6208B Professional Mixer** has ergonomically designed handles with a soft grip feature. The 2-speed power mixer motor incorporates a soft start feature with a variable speed control settings. Safety on/off switch also has a lock-on button for continuous operation. The tool uses a heavy-duty gearbox with a powerful high torque motor specially designed for mixing. Includes a BNR010-140 paddle, 1/2" drill chuck and M14 adapter.



Power	1300W / 11 Amps / 1.7 Hp
Voltage	120V/60Hz
Number of Gears	2
No Load Speed I	180 - 460 rpm
No Load Speed II	300 - 700 rpm
Mixing Paddle Connection	M14 x 2 / 1/2" drill chuck
Motor Protective Type / Class	Double Insulated / II
Mixing Paddle (ø Max.)	5-1/2" (140mm)
Shipping Weight	16.5 lbs (7.5 Kg)

**The BNR6400 Professional Mixer** has ergonomically designed handles with a soft grip feature. The 2-speed power mixer motor incorporates a soft start feature with a variable speed control settings. Safety on/off switch also has a lock-on button for continuous operation. The tool uses a heavy-duty gearbox with a powerful high torque motor specially designed for mixing. Includes a BNR010-140 paddle, 1/2" drill chuck and M14 adapter

Power	1800W / 15 Amps
Voltage	120V/60Hz
Number of Gears	2
No Load Speed I	150 - 300 rpm
No Load Speed II	300 - 700 rpm
Motor Protective Type	Double Insulated
Mixing Paddles (ø Max.)	6-1/2" (160mm)
Shipping Weight	21 lbs (8.5 Kg)





## BN Products - USA

**The BNR6402A Professional Mixer** has ergonomically designed handles with a soft grip feature. The 2-speed power mixer motor incorporates a soft start feature with a variable speed control settings. Safety on/off switch also has a lock-on button for continuous operation. The tool uses a heavy-duty gearbox with a powerful high torque motor specially designed for mixing. Includes our BNR008-12 mixing paddles




Power	1400W / 11.7 Amps / 1.9 Hp
Voltage	120V/60Hz
Number of Gears	2
No Load Speed I	180 - 460 rpm
No Load Speed II	300 - 700 rpm
Motor Protective Type / Class	Double Insulated / II
Mixing Paddle ( ø Max.)	4-3/4" (120mm)
Shipping Weight	19 lbs (8.5 Kg)

### Mixing Paddles for the BN Power Mixers



BNRA0315	1/2" Drill Chuck
BNR001 - Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for plasters, adhesive mortars, mortars, tile adhesives and fillers, best for sticky and viscous materials. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads
BNR002-57	Diameter: 57 mm (2.25") • Overall length: 13.5" • Designed for paints, lacquers, thin coatings, and ready-mix plaster. Use on BN6169 or drill. • Material Flow: Top to Bottom • Connection: 5/16" hex shank
BNR003-Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for concrete, mortars, plasters, heat-insulating plasters, and epoxy resin with sand, best for heavy and high viscosity materials. • Material Flow: Top to Bottom • Connection: M14 x 2 male threads
BNR004-Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for thin-set, tile adhesive, grout, adhesive mortars, ready-mix mortars, and pointing mortars, and fillers, best for small volumes on high speed mixers. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads
BNR005-120	Diameter: 120 mm (4.75") • Overall length: 60 cm (24") • Designed for plasters, adhesive mortars, tile adhesive and fillers, best for sticky and viscous materials. • Material Flow: Bottom to Top • Connection: M14 x 2 male threads
BNR006-100	Diameter: 100 mm (3.875") • Overall length: 60 cm (24") • Designed for paints, lacquers, glazings, primers, and paste, best for small volumes of low viscosity materials • Recommended to use on BNR6169. • Material Flow: Top to Bottom • Connection: M14 x 2 male threads
BNR008-120 Paddles sold in pairs left & right	Diameter: 120 mm (4.75") Overall length: 60 cm (24") • Designed for concrete, cement, mortars, and grouts with aggregate less than 3/8" diameter. Also for gypsum lime plaster, fibrated aluminum roof coatings and paints. Not for highly viscous materials. • Material Flow: Top to Bottom • Connection: 13 mm or 1/2" Hex Shank, for BN6402A mixer.

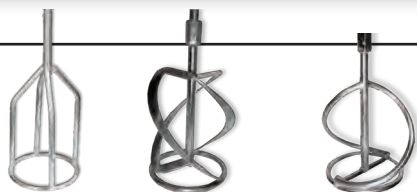

BNR009-Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for fillers, bitumen coatings, joint cement, epoxy-resin compounds, and grouting compounds, best for prevention of lump formation and lessens adding air into the mixture. Mixture flow is parallel. • Connection: M14 x 2 male threads
BNR010-Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for gypsum-lime plaster, fibrated aluminum roof coatings, and paints. This paddle can be disassembled in two pieces and fit into a carrying case. • Material Flow: Top to Bottom • Connection: M14 x 2 male thread
BNR011-Specify Diameter	120 mm (4.75") or 140 mm (5.50") • Overall length: 60 cm (24") • Designed for paints, lacquers, glazings, primers, and paste. This paddle can be disassembled in two pieces and fit into a carrying case. • Material Flow: Top to Bottom • Connection: M14 x 2 male threads

## BN Portable Material Mixer Stands



Product No.	Notes:
BNMG6100	Portable mixing stand for buckets and tubs
BNMG6100A	Portable mixing stand for wheel barrow application
BNMG6100R	Ramps only for wheel barrow application

**All tools, parts and accessories are shipped  
FOB: Wickenburg, AZ  
(unless stocked by our Manufacturer Representatives)**

### ORDERING NOTES

**PREPAID FREIGHT: THREE (3) or more tools will receive prepaid freight to one location within the continental United States.** The term "tool" refers to "per part number", an electrically powered unit (corded or cordless) unless designated with the following asterisks - see below. For example: DCC-1618 cordless, DC-16LZ Cutter, DBD-16H Combination Unit, and the DBC-2525 Combination Unit are all considered one tool

\*Prepaid Freight is offered when ordering 4 or more units.

\*\*Prepaid Freight is offered when ordering 6 or more units.

\*\*\*Prepaid Freight is offered when ordering 10 or more units

**Prepaid freight is also available on parts and accessory orders including**

**BN-Wire totalling more than \$2,300 USD.**

The preceding MSRP prices are a suggested retail value; the actual purchase price that an end-user would pay can be lower. Prices are subject to change without notice. All tools, parts and accessories are shipped FOB: Wickenburg, AZ. There is a standard 20% restocking charge on returned merchandise. Warranty – One year parts and labor (only through our authorized warranty repair centers) except MBC-16 Manual Cutter/Bender warranty is six (6) Months and BNGS710 Gas-Powered Saw warranty is 90 days. Any questions please call BN Products Customer Service Toll Free Number (800) 992-3833 or (928) 684-2813.